


G tech sliding system

A contemporary system for internal doors. All the hardware is manufactured from stainless steel (grade 304) with a superb satin finish.

Suitable for 10mm and 12mm toughened glass.
Recommended lock GL34S (see page 10).

Maximum door height: **2500mm**
Maximum door width: **1360mm**
Maximum door weight: **100kg**

Note: The roller hangers and also bracket GSD151C require countersunk holes in the glass.

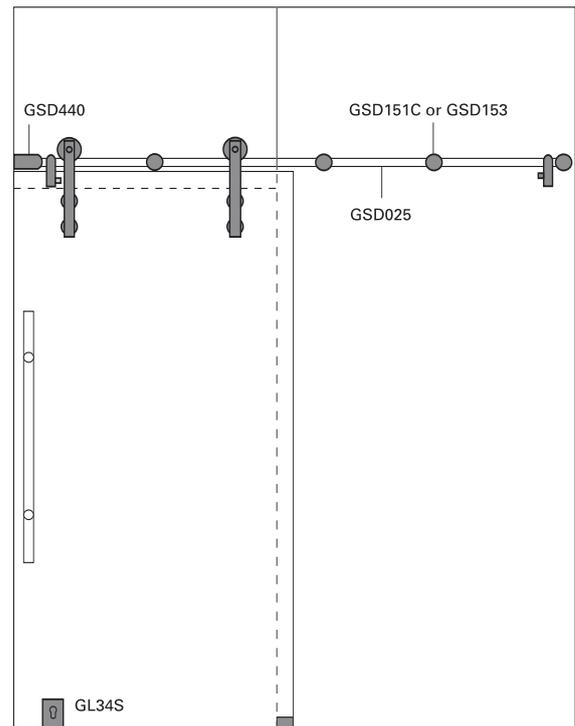

GSD400C

Door Pack containing two roller hangers, door stops and floor guide.

GSD025

Door Rail 3000mm stock length (cut to size as required) and supplied with endcaps where necessary

GSD151C

Rail bracket for glass door to glass panel fixing



GSD153

Rail bracket for glass door to wall fixing

Note: We will supply the correct number of brackets against details of door size and application.



GSD440

Rail end bracket, recommended when the end of the rail abuts a 90° wall.



200B

Door handle

Available in two sizes
450mm overall with
300mm hole centres.


750mm overall with
600mm hole centres.

Tube Ø 25mm

Finish satin stainless steel.



GX512.1
Wall mounted hinge

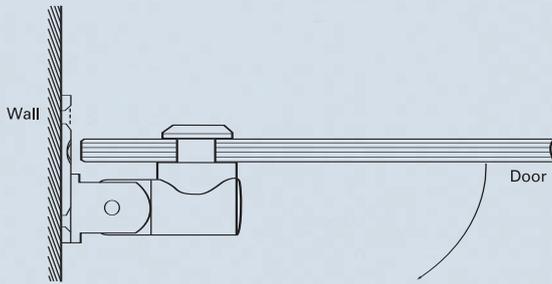

G tech hinge system


A contemporary system for internal doors and partitions which is also suitable for shower enclosures (8mm and 10mm only). The hardware is manufactured from solid stainless steel 25mmØ bar (grade 304) with a superb satin finish.

The hinges are non-sprung, outward opening only but available in 3 fixing options. There are also matching connectors and magnetic catches.


All hardware is suitable for 8mm, 10mm and 12mm glass.

Maximum door weight using 2 hinges:	40kg
Maximum door weight using 3 hinges:	55kg
Maximum door width:	950mm


All hinges open to a maximum 90°



Wall mount




180° glass to glass




90° glass to glass

GX512.2
180° glass to glass
hinge

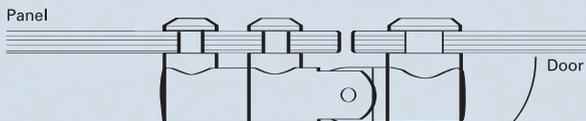


GX512.4
90° glass to glass hinge

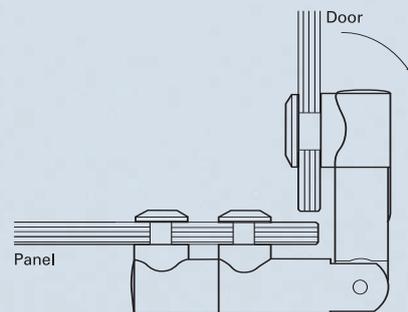


GX62.1 MH

Wall mounted magnetic catch and door stop




GX62.2 MH

180° glass to glass magnetic catch and door stop

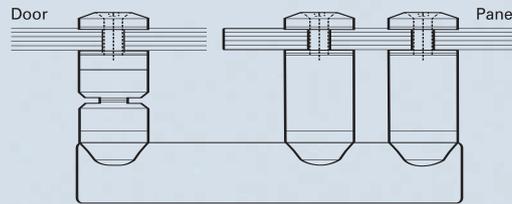


GX62.4 MH

90° glass to glass magnetic catch and door stop

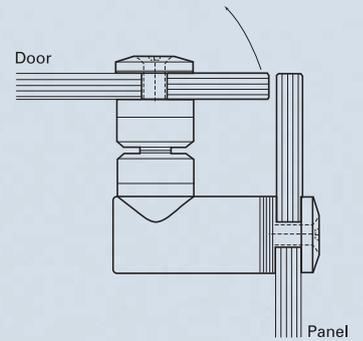


GX62.1

Connector to fix a glass panel to the wall, floor or ceiling




GX62.2

180° glass to glass connector for fixed panels

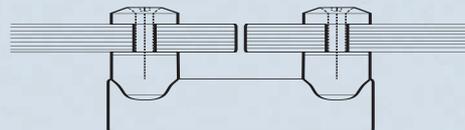

GX62.4

90° glass to glass connector for fixed panels




G tech pivot system

A contemporary alternative to patches on external doors. The hardware is manufactured from solid stainless steel (grade 304) with a superb satin finish and is adjustable for ease of installation.

Suitable for 10mm and 12mm glass.
Recommended lock GL34S (see page 10).

Maximum door width: **1200mm**
Maximum door weight: **90kg**

Note: All fittings require countersunk holes in the glass.

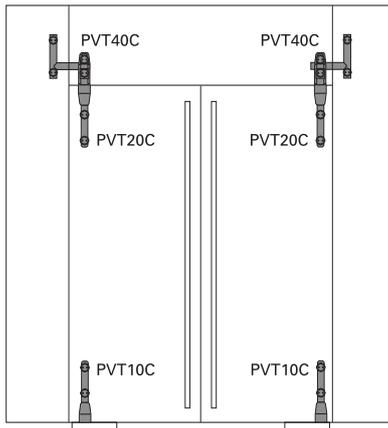

PVT40C
Over panel pivot



PVT30C
Over panel pivot




PVT20C
Top pivot

To be used in conjunction with over panel pivots PVT30 or PVT40. If the door panel is within a frame then one of the following pivots should be used: 9124, 9129 or 9116 (see page 4)

PVT10C
Bottom pivot

To be used in conjunction with floor pivot 9115 (see page 5) for manual doors or floor spring GTS840 for self closing doors.

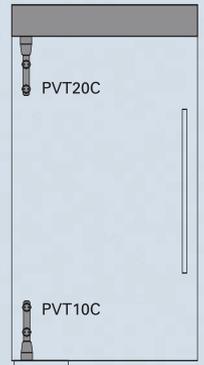

PVT60C
Over panel connector

