


## GT patch system

The patch fittings are extremely neat in design (generally 164 x 52mm) and are engineered to the highest standards. They have specially formulated aluminum alloy base bodies and polymer impregnated gaskets to ensure a firm grip on the glass surface. The load bearing bottom door patch has a hardened stainless steel inserts. All covers are manufactured from grade SUS304 stainless steel which is precision stamped and deep drawn to form smooth, continuous corners. The covers are available in polished or satin finishes.

### Notes:

If the covers are to be powder coated (by others) then please advise at the time of ordering. We can also provide covers with alternative finishes. Please contact our sales office with your enquiries.

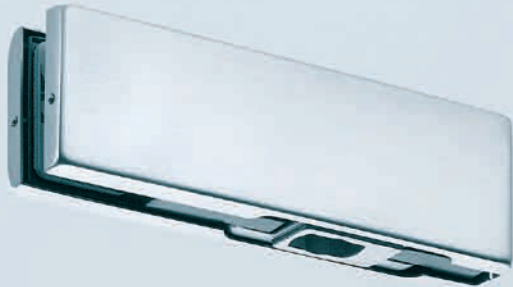

### GT10



Bottom door patch

To be used in conjunction with floor pivot 9115 for manual doors or floor spring GTS840 for self closing doors.

### 9115 Pivot



### GT22 Top Door Patch For use with Transom Closers only.



### GTS850

GT22

GT10

9115




GT30

9116

GT20

GT10

GTS840

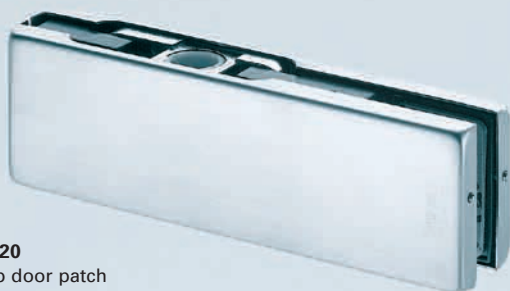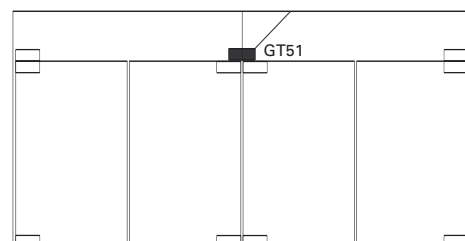

### GT20

Top door patch

To be used in conjunction with over panel pivot patches or if the door is within a frame then one of the following:

No. 9124

Pivot with fixing plate

No. 9129

Pivot for brickwork fixing

No. 9116

Adjustable top centre


### 9116



9124

9129

**GT30**  
 Over panel pivot patch  
 Supplied complete with  
 M8 stud and brass plug  
 for brickwork fixing  
 or aluminum mounting  
 plate for frame fixing.

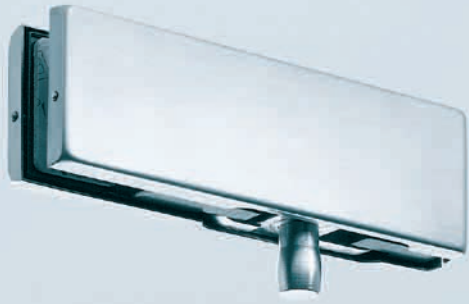


**GT40**  
 Corner pivot patch  
 For fitting to the over  
 panel and side panel.



**GT41**  
 Corner pivot patch  
 with fin



**GT51**  
 Double over panel  
 pivot patch with fin






**GL50S**  
Corner patch lock


Fitted with a hardened pin bolt and supplied with a euro profile cylinder either keyed both sides or keyed one side with a thumbturn on the other side. Keyed alike locks can be supplied for multiple installations.

A variety of keeps are available



**GL50S/CL**  
Centre patch lock

Same specification as the corner lock. Also available with **GL50/K** centre patch keep.

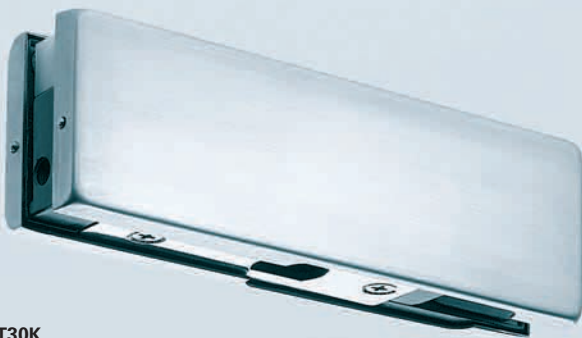


**GT30K**  
Over panel lock strike patch

To be used in conjunction with GL50S corner lock. Supplied complete with M8 stud and brass plug for brickwork fixing or aluminium mounting plate for frame fixing.



**GT41K**  
Corner lock strike patch with fin



**GT40K S**  
Corner lock strike patch with stop.

For fitting to the over panel and side panel and used in conjunction with GL50S corner lock. Door stop is removable.

**GL50/2K S**

Double over panel lock strike patch with stop.

To be used in conjunction with locks GL50S on double doors.

Door stop is removable.



**GT40/S**

Corner patch stop

For fitting to over panel and side panel.



**GL24**  
Retrofit Patch Lock



This lock can be fitted to the door without any notching or drilling of the glass. Supplied with a euro profile cylinder keyed one side only. Available with **GL24K** patch keep.



**GL52**  
Turn knob patch lock  
Operates from one side only. Available with **GL52K** patch keep (not illustrated and to special order).


**GT70**  
Over panel stop patch

Can be used on single or double door applications. The stops are removable and the patch can be used as a connector.

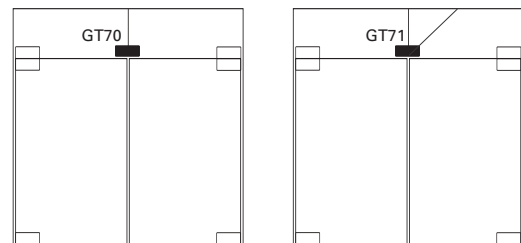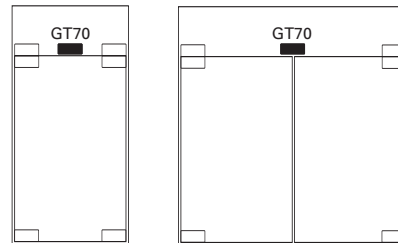

**GT71**  
Over panel connector patch with fin

Cannot be used as a stop patch.

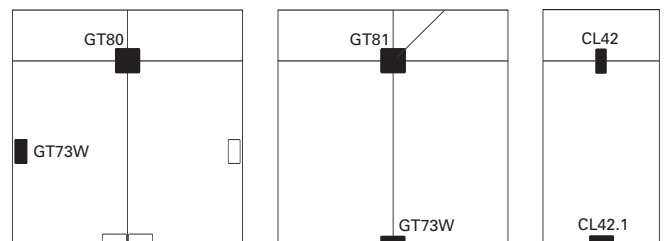





**GP10**  
Bottom door patch


To be used in conjunction with floor pivot 9115 for manual doors (see page 4) or floor spring GTS840 for self closing doors.

## GP patch system

An alternative to the GT range, the patches are slightly smaller (110 x 70mm) and although suitable for exterior use, they are often specified for internal doors, retail and museum cabinets. The covers are manufactured from grade 304 stainless steel with a satin finish. Polished covers are available to special order.

All GP hardware is suitable for 10mm or 12mm toughened glass.

Maximum door width: **1000mm**  
Maximum door weight: **90kg**

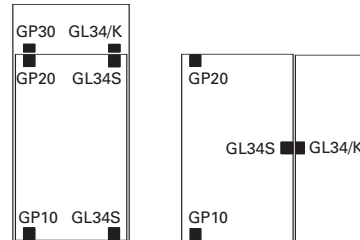

**GP20**  
Top door patch

To be used in conjunction with our over panel pivot patch **GP30** or if the door is within a frame then one of the following: 9124 Pivot, 9129 Pivot, or 9116 top centre (see page 4).

**GL34 S**  
Patch lock

Fitted with a hardened pin bolt and supplied with a euro profile cylinder either keyed both sides or keyed one side with a thumbturn on the other side. Keyed alike locks can be supplied for multiple installations.



**GL34/K**  
Patch keep

For double doors and side or over panels.

**GT80**  
Fixed panel connector patch



**GT81**  
Fixed panel connector patch with fin




**GT73W**  
Side connector patch  
For holding fixed panels and fins. Supplied complete with M8 stud and brass plug for brickwork fixing or stainless steel mounting plate as illustrated.



**CL**  
Connectors  
Manufactured from stainless steel plate. The model CL42 is for connecting glass to glass panels and the model CL42.1 glass to wall panels and is supplied with fixings screws.

**CL42.1**

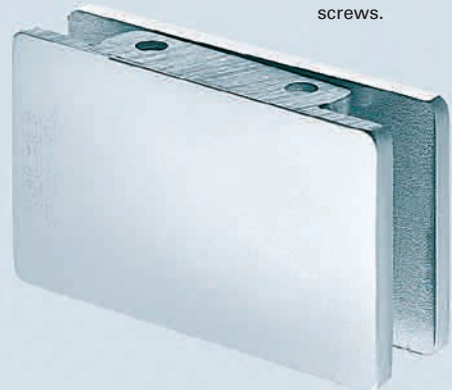

**CL42**

