



1. Base Rail

The aluminium base rail should be placed onto its designated position and the holes marked onto the substrate for drilling. Once the shoe is level, the fixings should be tightened up to make the channel rigid. The fixings must be tightened in accordance with the manufacturers instructions.

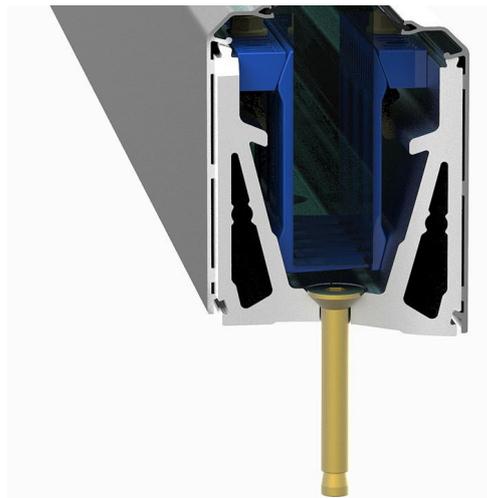


2. Glass slip clamp fitting

The glass slip clamps need to be placed on the bottom of the glass. This requires lifting the glass off the floor sufficiently or applying to the top of the glass and rotating into the channel. The slip clamps require spacing so that four are used per metre. The clamps placed on either end of the glass should be located 125mm from the edge of the glass and then 250mm centres. The glass can now be placed into the channel.

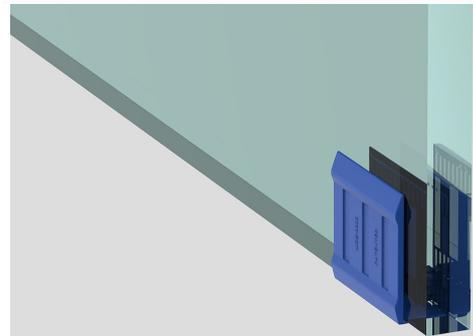


3. Preparing the Mega-Hook

The Clamp bar needs to be slid over the screw threaded end and the bolt loosely tightened so the bar can easily spin into the correct position.

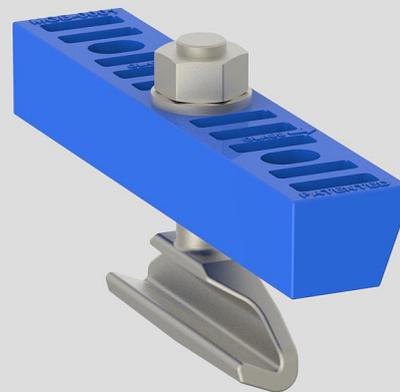

4. Glass Clamp Bar Fitting


You now need to place the Grapple hooks into the top of each glass slip clamp. Lower the hook next to the plastic clamp, and hook into the metal lip. The angled side of the plastic clamp bar must face the angled glass clamp. As shown in the image to the right.

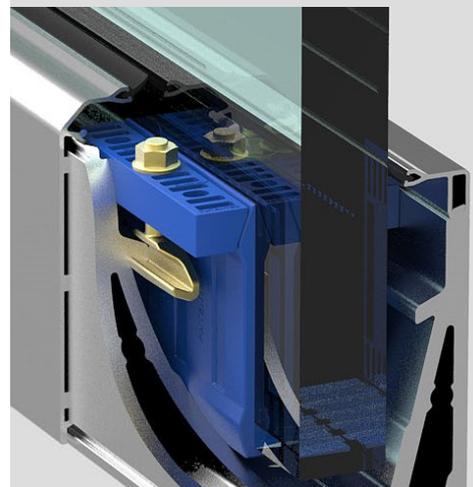

4. Getting the glass level

You now need to get the glass level. Manoeuvre the glass whilst the bolts are loose until it is in the correct position.


Now the bolts can be tightened, firstly finger tighten each side before using a ratchet/torque bar. The bolts must be tightened to 15Nm.

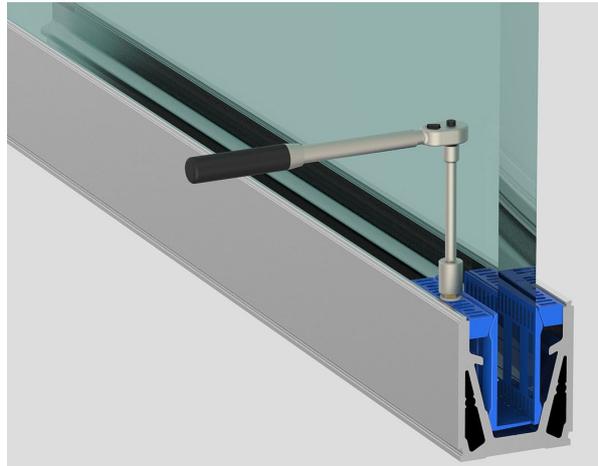

5. Top Seal Strip/Cladding

The gasket requires feeding into the Side cladding and/or top bead supplied, you must not stretch the gasket. Once the gasket is flush with each end of the strip it now needs to be clipped onto the top of the channel, this can be done by pressing firmly down on the profile. Working from one end to the other.

The Side cladding has a lower clip which must line in the channel it must then be firmly pushed at the top towards the glass. Addition securing tape can be applied.

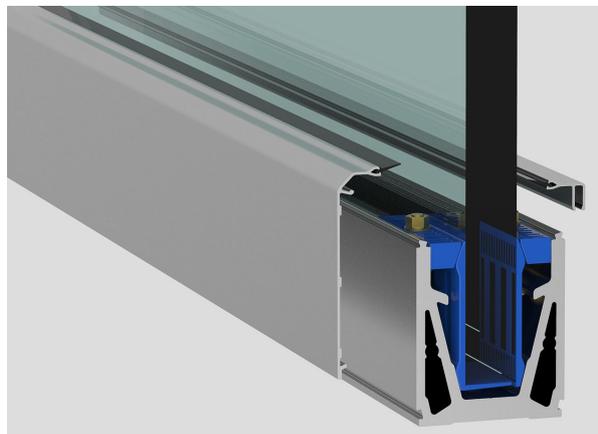

6. Cleaning

Once you are happy everything is in place and the job is complete, you need to clean the glass and channel. Use a non abrasive glass cleaner on the glass and warm soapy water on the MegaGrip channel. We also recommend a soft sponge or cloth, again to avoid damaging the channel or glass.

We have tried to make the system as simple and easy to install as possible, however should you not feel confident enough to fit this please contact a reputable glazier or builder.

Should any problems arise please don't hesitate to contact us through the following ways:-

T:- 01208 261 040

F:- 01208 261 041

E:- Sales@Purevista.co.uk

www.pure-vista.com